




Foshan Xingyuan Auto Accessories Co.,Ltd
Xingyuan LED Lighting (HK) Industrial Limited

Add:NO.2, 11th Street, Fengxiang Road, Fengxiang Industrial Area,
Daliang, Shunde District, Foshan City, Guangdong, China
Tel: +86-757-22667066 22227365 E-mail: admin@xingyuan-lighting.com
<http://www.xingyuan-led.com> <http://www.xingyuanled.com.cn>



LED WARNING LIGHT BAR



Item NO.: XYAL-2021-160W-1.2m

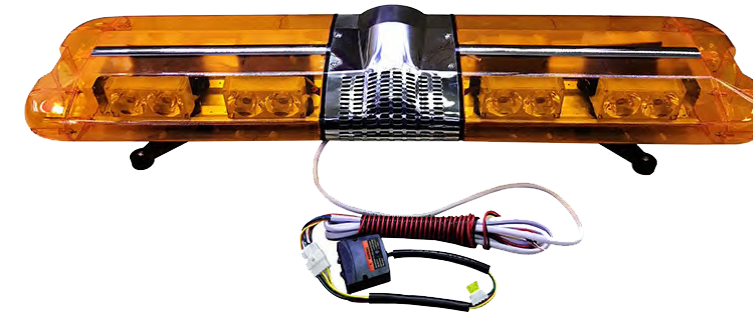


CE EMC

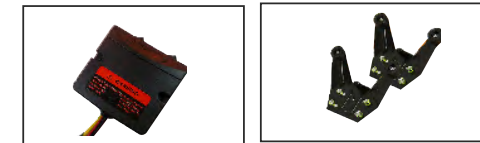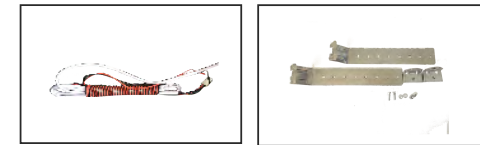

DESCRIPTION


- .Multi-Voltage: LED 12-24V DC
- .High Intensity: COB High Power
- .Power:160W
- .Main material:PC Lens
- .Impact resistant polycarbonate lens
- .LED Color :Amber,Red,Blue,White
- .Cover Color Available: Red Blue Clear Amber
- .Base Material:Aluminum+PC
- .16 kinds of flash method
- .Environmental Temperature (Normal Working):-30 / +50 °C
- .Dust and Waterproof to IP67

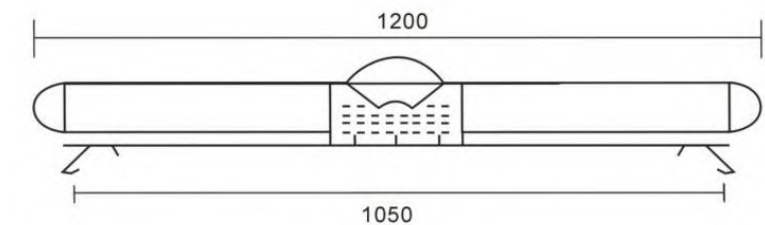

Item NO.: XYAL-2068-220W-1.2m



CE EMC

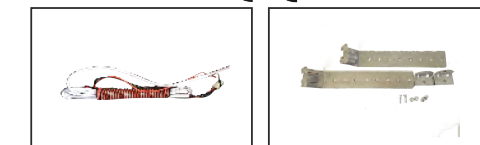

DESCRIPTION

- .Multi-Voltage: LED 12-24V DC
- .High Intensity: COB High Power
- .Power:220W
- .Main material:PC Lens
- .Impact resistant polycarbonate lens
- .LED Color :Amber,Red,Blue,White
- .Cover Color Available: Red Blue Clear Amber
- .Base Material:Aluminum+PC
- .16 kinds of flash method
- .Environmental Temperature (Normal Working):-30 / +50 °C
- .Dust and Waterproof to IP67




APPLICATION




LED WARNING LIGHT BAR

Item NO.: XYAL-1523-220W-1.2m

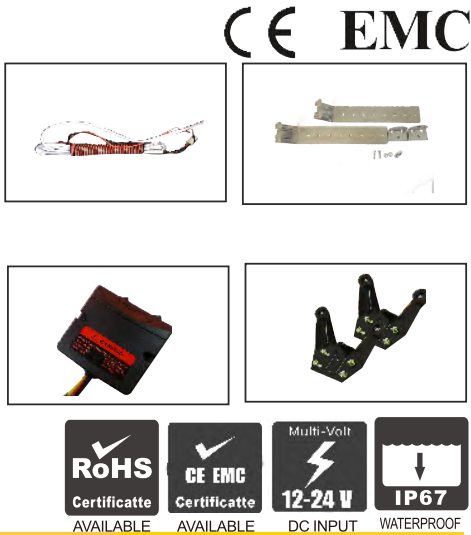


DESCRIPTION

- .Multi-Voltage: LED 12-24V DC
- .High Intensity: COB High Power
- .Power:220W
- .Main material:PC Lens
- .Impact resistant polycarbonate lens
- .LED Color :Amber,Red,Blue,White
- .Cover Color Available: Clear
- .Base Material:Aluminum+PC
- .16 kinds of flash method
- .Environmental Temperature (Normal Working):-30 / +50 °C
- .Dust and Waterproof to IP67

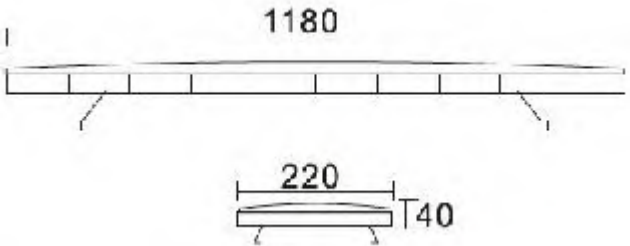

Item NO.: XYAL-1448-180W-1.035m

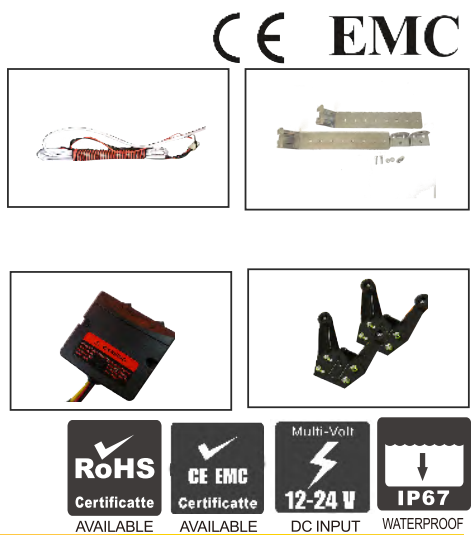

DESCRIPTION

- .Multi-Voltage: LED 12-24V DC
- .High Intensity: COB High Power
- .Power:180W
- .Main material:PC Lens
- .Impact resistant polycarbonate lens
- .LED Color :Amber,Red,Blue,White
- .Cover Color Available: Clear
- .Base Material:Aluminum+PC
- .13kinds of flash method
- .Environmental Temperature (Normal Working):-30 / +50 °C
- .Dust and Waterproof to IP67




APPLICATION



LED WARNING LIGHT BAR

Item NO.: XYAL-1220-1.2m

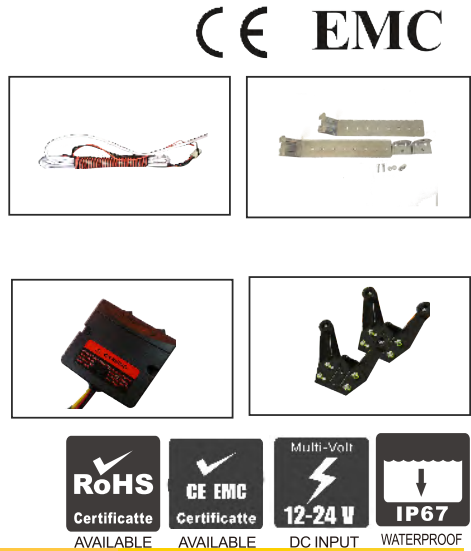


DESCRIPTION

- .Multi-Voltage: LED 12-24V DC
- .High Intensity: F5 High Power
- .Main material:PC Lens
- .Impact resistant polycarbonate lens
- .LED Color :Red/Blue/Amber/Green/White
- .Cover Color Available: Red Blue Clear Amber
- .Base Material:Aluminum+PC
- .15kinds of flash method
- .Environmental Temperature (Normal Working):-30 / +50 °C
- .Dust and Waterproof to IP67




Item NO.: XYAL-1221-1.2m

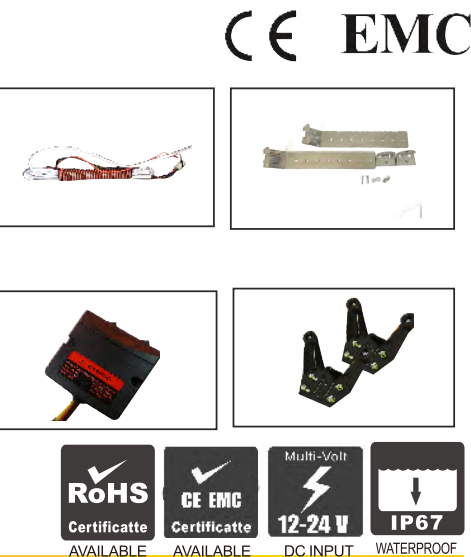

DESCRIPTION

- .Multi-Voltage: LED 12-24V DC
- .High Intensity: F5 High Power
- .Main material:PC Lens
- .Impact resistant polycarbonate lens
- .LED Color :Red/Blue/Amber/Green/White
- .Cover Color Available: Red Blue Clear Amber
- .Base Material:Aluminum+PC
- .15kinds of flash method
- .Environmental Temperature (Normal Working):-30 / +50 °C
- .Dust and Waterproof to IP67

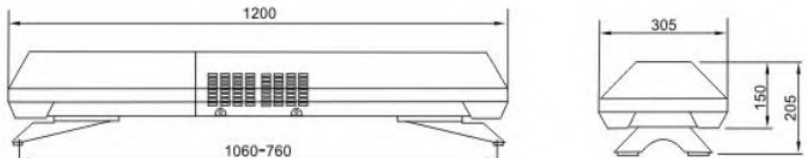

APPLICATION






LED WARNING LIGHT BAR

Item NO.: XYAL-1222-1.2m




CE EMC

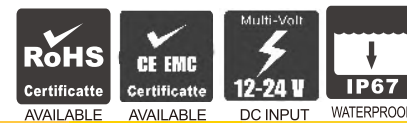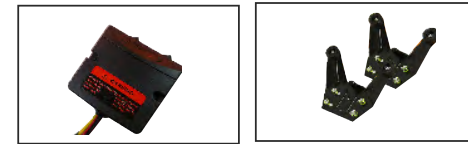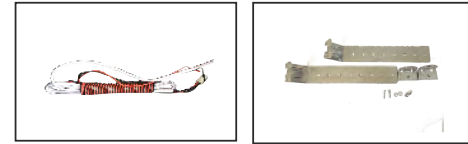

DESCRIPTION


- .Multi-Voltage: LED 12-24V DC
- .High Intensity: F5 High Power
- .Main material:PC Lens
- .Impact resistant polycarbonate lens
- .LED Color :Red/Blue/Amber/Green/White
- .Cover Color Available: Red Blue Clear Amber
- .Base Material:Aluminum+PC
- .15kinds of flash method
- .Environmental Temperature (Normal Working):-30 / +50 °C
- .Dust and Waterproof to IP67

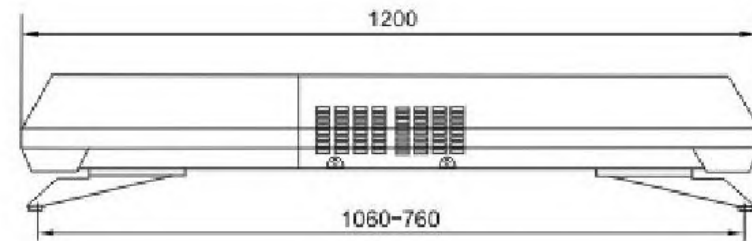

Item NO.: XYAL-1223-1.2m




CE EMC



DESCRIPTION

- .Multi-Voltage: LED 12-24V DC
- .High Intensity: F5 High Power
- .Main material:PC Lens
- .Impact resistant polycarbonate lens
- .LED Color :Red/Blue/Amber/Green/White
- .Cover Color Available: Red Blue Clear Amber
- .Base Material:Aluminum+PC
- .15kinds of flash method
- .Environmental Temperature (Normal Working):-30 / +50 °C
- .Dust and Waterproof to IP67

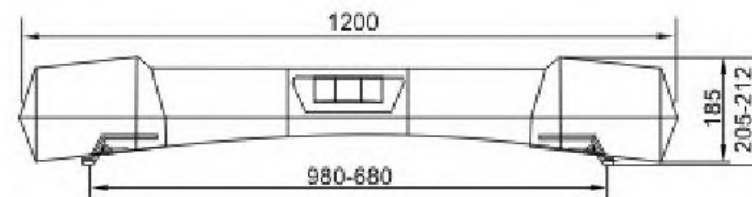

APPLICATION



LED WARNING LIGHT BAR

Item NO.: XYAL-1222-1.6m




CE EMC



DESCRIPTION


- .Multi-Voltage: LED 12-24V DC
- .High Intensity: F5 High Power
- .Main material:PC Lens
- .Impact resistant polycarbonate lens
- .LED Color :Red/Blue/Amber/Green/White
- .Cover Color Available: Red Blue Clear Amber
- .Base Material:Aluminum+PC
- .15kinds of flash method
- .Environmental Temperature (Normal Working):-30 / +50 °C
- .Dust and Waterproof to IP67

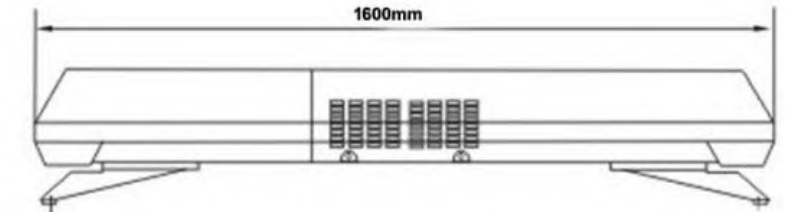

Item NO.: XYAL-1224-1.2m




CE EMC



DESCRIPTION

- .Multi-Voltage: LED 12-24V DC
- .High Intensity: F5 High Power
- .Main material:PC Lens
- .Impact resistant polycarbonate lens
- .LED Color :Red/Blue/Amber/Green/White
- .Cover Color Available: Red Blue Clear Amber
- .Base Material:Aluminum+PC
- .15kinds of flash method
- .Environmental Temperature (Normal Working):-30 / +50 °C
- .Dust and Waterproof to IP67

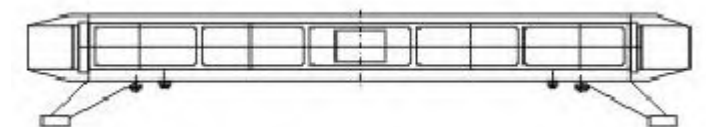


APPLICATION




LED WARNING LIGHT BAR

Item NO.: XYAL-1224-1.6m

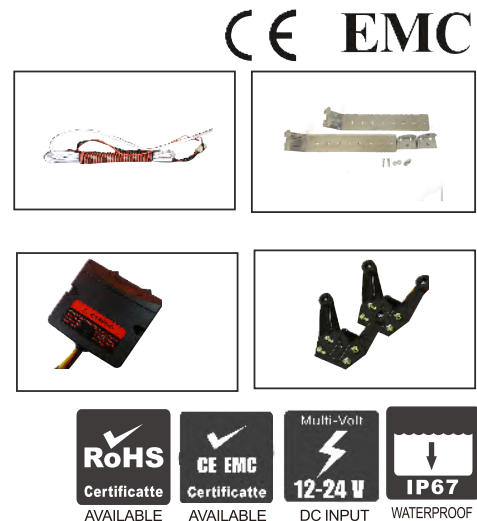


DESCRIPTION

- .Multi-Voltage: LED 12-24V DC
- .High Intensity: F5 High Power
- .Main material:PC Lens
- .Impact resistant polycarbonate lens
- .LED Color :Red/Blue/Amber/Green/White
- .Cover Color Available: Red Blue Clear Amber
- .Base Material:Aluminum+PC
- .15kinds of flash method
- .Environmental Temperature (Normal Working):-30 / +50 °C
- .Dust and Waterproof to IP67

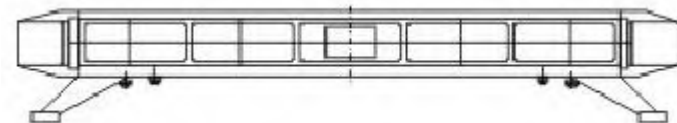

Item NO.: XYAL-1915-1.9m

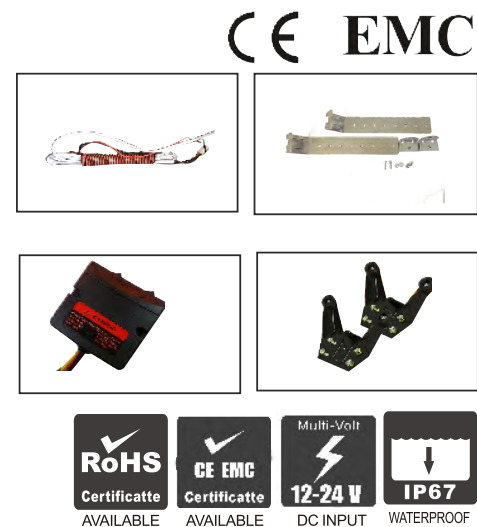

DESCRIPTION

- .Multi-Voltage: LED 12-24V DC
- .High Intensity: F5 High Power
- .Main material:PC Lens
- .Impact resistant polycarbonate lens
- .LED Color :Red/Blue/Amber/Green/White
- .Cover Color Available: Red Blue Clear Amber
- .Base Material:Aluminum+PC
- .15kinds of flash method
- .Environmental Temperature (Normal Working):-30 / +50 °C
- .Dust and Waterproof to IP67




APPLICATION




LED WARNING LIGHT BAR

Item NO.: XYAL-2041-1.2m


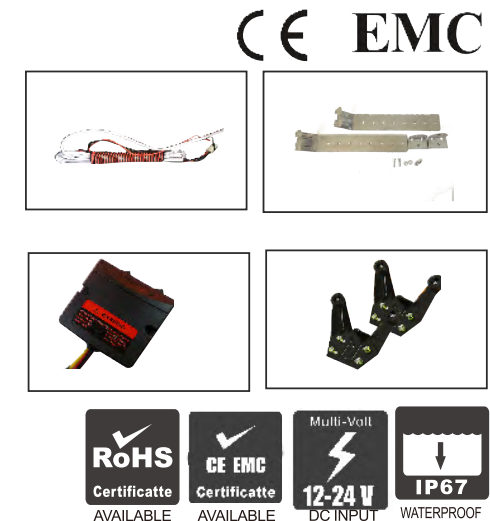


DESCRIPTION

- .Multi-Voltage: LED 12-24V DC
- .High Intensity: F5 High Power
- .Main material:PC Lens
- .Impact resistant polycarbonate lens
- .LED Color :Red/Blue/Amber/Green/White
- .Cover Color Available: Red Blue Clear Amber
- .Base Material:Aluminum+PC
- .3-5 kinds of flash method
- .Environmental Temperature (Normal Working):-30 / +50 °C
- .Dust and Waterproof to IP67

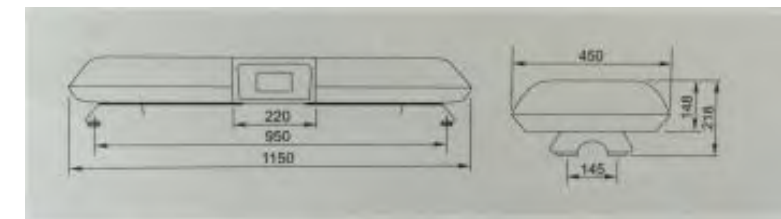

Item NO.: XYAL-1225-1.2m

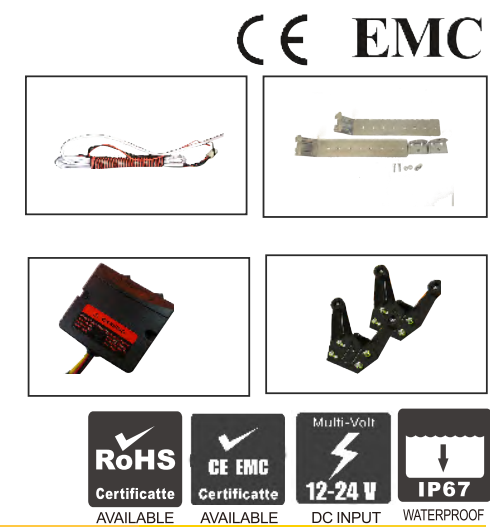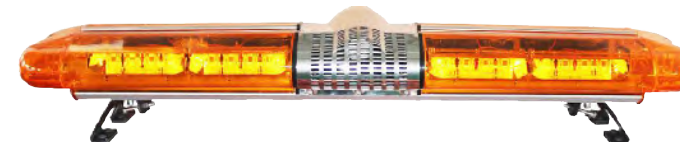

DESCRIPTION

- .Multi-Voltage: LED 12-24V DC
- .High Intensity: 1W or 3W High Power
- .Main material:PC Lens
- .Impact resistant polycarbonate lens
- .LED Color :Red/Blue/Amber/Green/White
- .Cover Color Available: Red Blue Clear Amber
- .Base Material:Aluminum+PC
- .15kinds of flash method
- .Environmental Temperature (Normal Working):-30 / +50 °C
- .Dust and Waterproof to IP67




APPLICATION




LED WARNING LIGHT BAR

Item NO.: XYAL-1226-1.2m

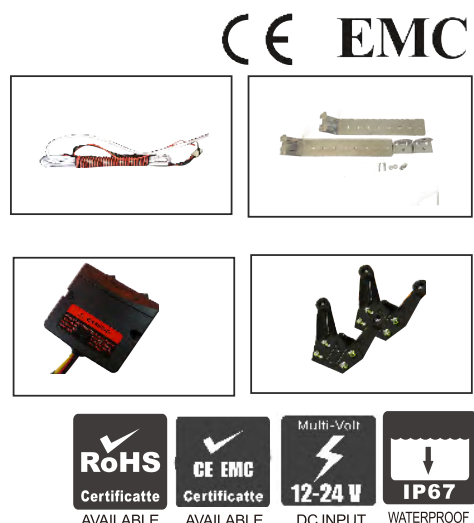


DESCRIPTION

- .Multi-Voltage: LED 12-24V DC
- .High Intensity: 1W or 3W High Power
- .Main material:PC Lens
- .Impact resistant polycarbonate lens
- .LED Color :Red/Blue/Amber/Green/White
- .Cover Color Available: Red Blue Clear Amber
- .Base Material:Aluminum+PC
- .15kinds of flash method
- .Environmental Temperature (Normal Working):-30 / +50 °C
- .Dust and Waterproof to IP67

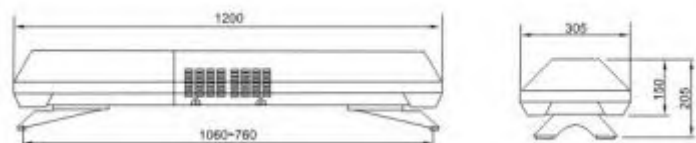


Item NO.: XYAL-1227-1.2m

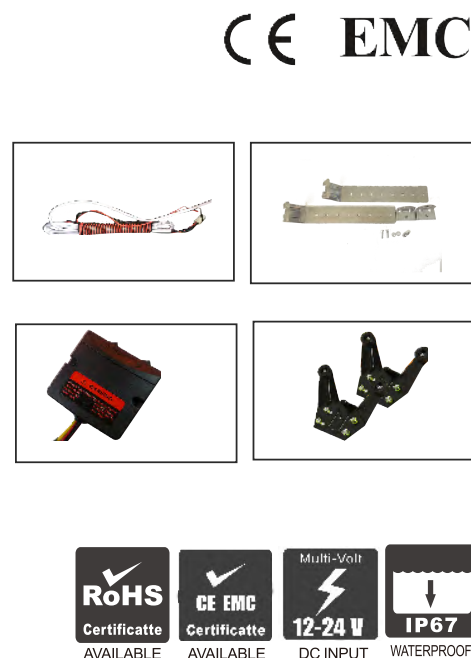

DESCRIPTION

- .Multi-Voltage: LED 12-24V DC
- .High Intensity: 1W or 3W High Power
- .Main material:PC Lens
- .Impact resistant polycarbonate lens
- .LED Color :Red/Blue/Amber/Green/White
- .Cover Color Available: Red Blue Clear Amber
- .Base Material:Aluminum+PC
- .15kinds of flash method
- .Environmental Temperature (Normal Working):-30 / +50 °C
- .Dust and Waterproof to IP67

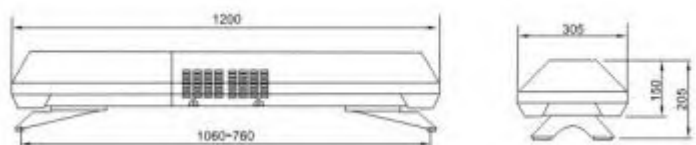

APPLICATION




LED WARNING LIGHT BAR

Item NO.: XYAL-1228-1.2m



DESCRIPTION

- .Optional Length:1.2m,,1.6m
- .Multi-Voltage: LED 12-24V DC
- .High Intensity: 1W or 3W High Power
- .Main material:PC Lens
- .Impact resistant polycarbonate lens
- .LED Color :Red/Blue/Amber/Green/White
- .Cover Color Available: Clear
- .Base Material:Aluminum+PC
- .15kinds of flash method
- .Environmental Temperature (Normal Working):-30 / +50 °C
- .Dust and Waterproof to IP67

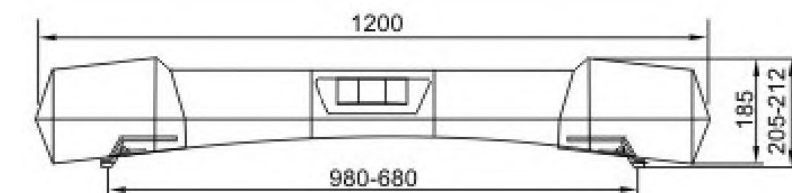


Item NO.: XYAL-1311-56W-76cm



DESCRIPTION

- .Multi-Voltage: LED 12-24V DC
- .High Intensity: 1W or 3W High Power
- .Main material:PC Lens
- .Impact resistant polycarbonate lens
- .LED Color :Red/Blue/Amber/Green/White
- .Cover Color Available: Clear
- .Base:Bracket or Magnet
- .15kinds of flash method
- .Environmental Temperature (Normal Working):-30 / +50 °C
- .Dust and Waterproof to IP67

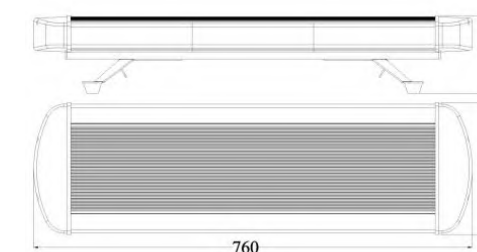


APPLICATION




LED WARNING LIGHT BAR

Item NO.: XYAL-1310-72W-97.5cm

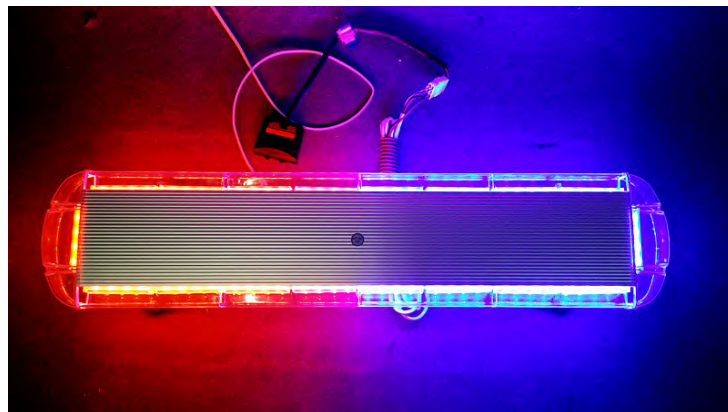


DESCRIPTION

- .Multi-Voltage: LED 12-24V DC
- .High Intensity: 1W or 3W High Power
- .Main material:PC Lens
- .Impact resistant polycarbonate lens
- .LED Color :Red/Blue/Amber/Green/White
- .Cover Color Available: Clear
- .Base Material:Aluminum+PC
- .15kinds of flash method
- .Environmental Temperature (Normal Working):-30 / +50 °C
- .Dust and Waterproof to IP67


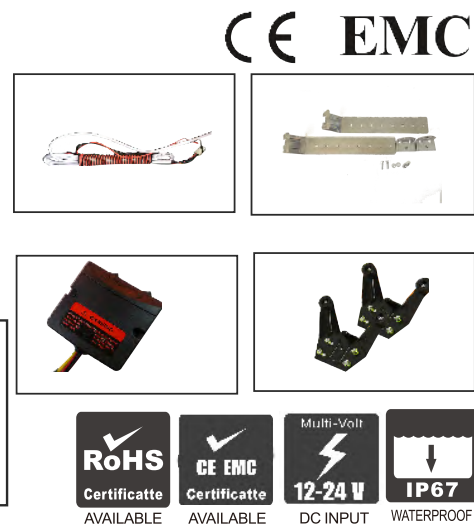


Item NO.: XYAL-E207-88W-1.2m

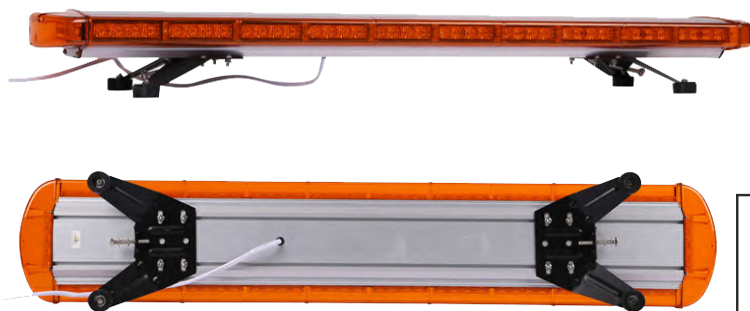

DESCRIPTION

- .Optional Length: 1.2m,1.4m,1.5m,1.6m,1.8m.
- .Multi-Voltage: LED 12-24V DC
- .High Intensity: 1W or 3W High Power
- .Main material:PC Lens
- .Impact resistant polycarbonate lens
- .LED Color :Red/Blue/Amber/Green/White
- .Cover Color Available: Clear
- .Base Material:Aluminum+PC
- .15kinds of flash method
- .Environmental Temperature (Normal Working):-30 / +50 °C
- .Dust and Waterproof to IP67

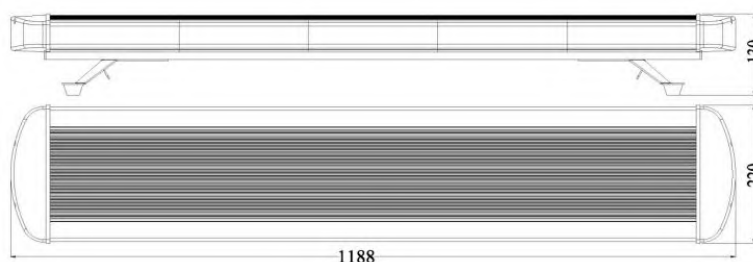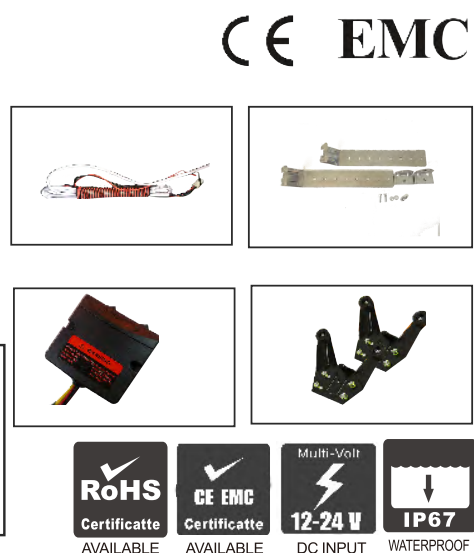


APPLICATION




LED WARNING LIGHT BAR

Item NO.: XYAL-1528-128W-1.2m

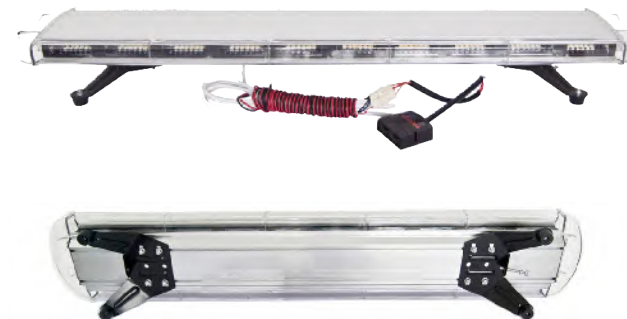


DESCRIPTION

- .Multi-Voltage: LED 12-24V DC
- .High Intensity: 1W or 3W High Power
- .Main material:PC Lens
- .Impact resistant polycarbonate lens
- .LED Color :Red/Blue/Amber/Green/White
- .Cover Color Available: Clear
- .Base Material:Aluminum+PC
- .15kinds of flash method
- .Environmental Temperature (Normal Working):-30 / +50 °C
- .Dust and Waterproof to IP67


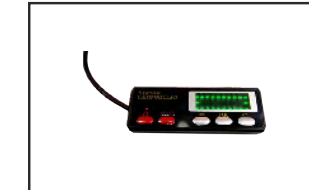


Item NO.: XYAL-0698-88W-1.2m

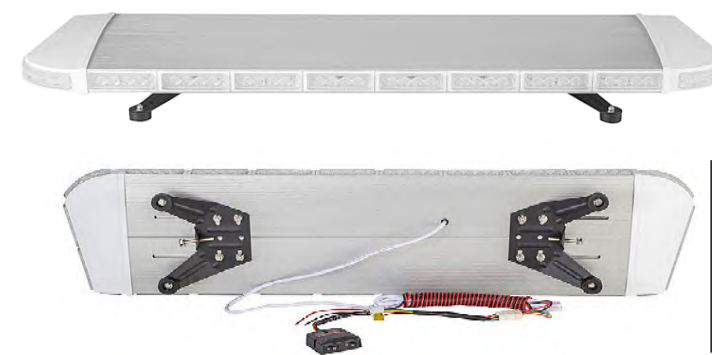

DESCRIPTION

- .Optional Length: 48.5cm,70cm,94.5cm,1.2M.
- .Multi-Voltage: LED 12-24V DC
- .High Intensity: 1W or 3W High Power
- .Main material:PC Lens
- .Impact resistant polycarbonate lens
- .LED Color :Red/Blue/Amber/Green/White
- .Cover Color Available: Clear
- .Base Material:Aluminum+PC
- .15kinds of flash method
- .Environmental Temperature (Normal Working):-30 / +50 °C
- .Dust and Waterproof to IP67

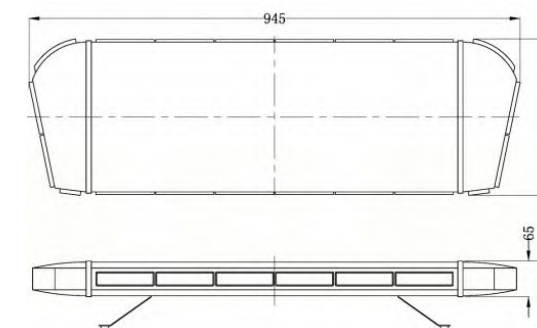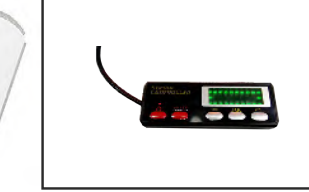


APPLICATION




LED WARNING LIGHT BAR

Item NO.: XYAL-1230-88W-1.2m

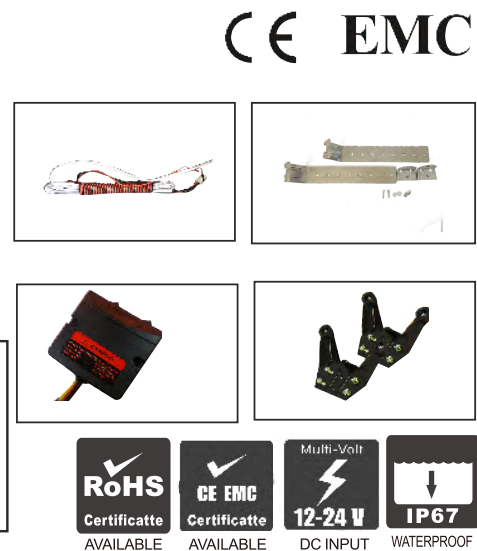


DESCRIPTION

- .Optional Length: 90cm,1.2m,1.5m,1.8m,2m.
- .Multi-Voltage: LED 12-24V DC
- .High Intensity: 1W or 3W High Power
- .Main material:PC Lens
- .Impact resistant polycarbonate lens
- .LED Color :Red/Blue/Amber/Green/White
- .Cover Color Available: Clear
- .Base Material:Aluminum+PC
- .15kinds of flash method
- .Environmental Temperature (Normal Working):-30 / +50 °C
- .Dust and Waterproof to IP67

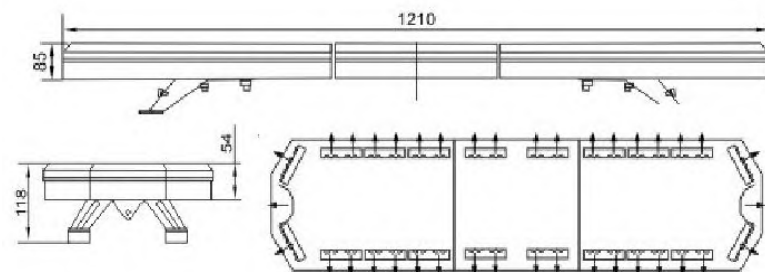


Item NO.: XYAL-1540-80W-1.2m

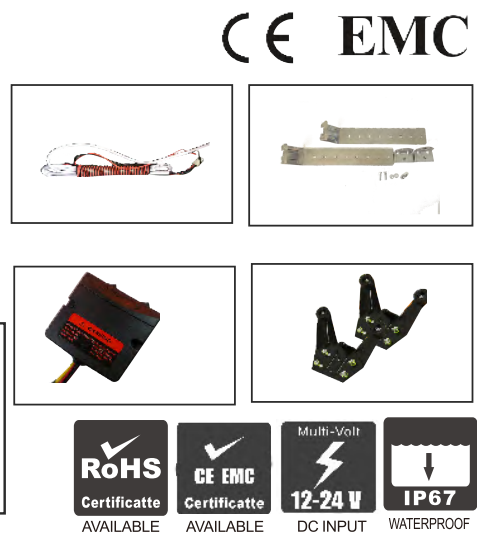

DESCRIPTION

- .Optional Length:1.2m,1.8m
- .Multi-Voltage: LED 12-24V DC
- .High Intensity: 1W or 3W High Power
- .Main material:PC Lens
- .Impact resistant polycarbonate lens
- .LED Color :Red/Blue/Amber/Green/White
- .Cover Color Available: Clear
- .Base Material:Aluminum+PC
- .15kinds of flash method
- .Environmental Temperature (Normal Working):-30 / +50 °C
- .Dust and Waterproof to IP67


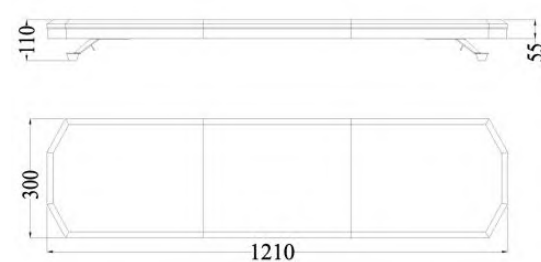


APPLICATION




LED WARNING LIGHT BAR

Item NO.: XYAL-1232-88W-1.2m

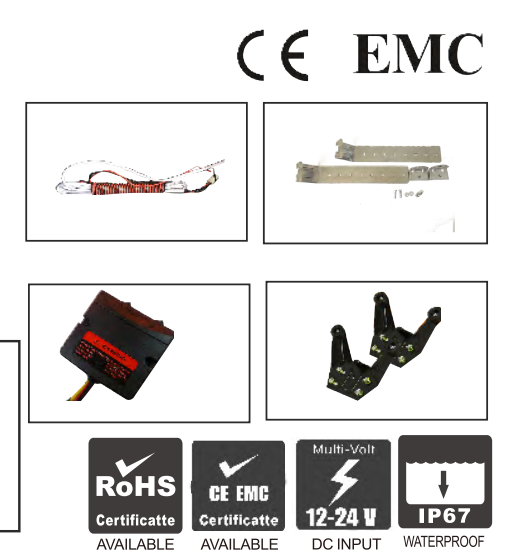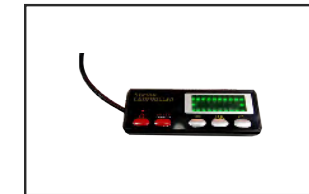

DESCRIPTION

- .Optional Length:1.2m,1.5m,1.8m
- .Multi-Voltage: LED 12-24V DC
- .High Intensity: 1W or 3W High Power
- .Main material:PC Lens
- .Impact resistant polycarbonate lens
- .LED Color :Red/Blue/Amber/Green/White
- .Cover Color Available: Clear
- .Base Material:Aluminum+PC
- .15kinds of flash method
- .Environmental Temperature (Normal Working):-30 / +50 °C
- .Dust and Waterproof to IP67

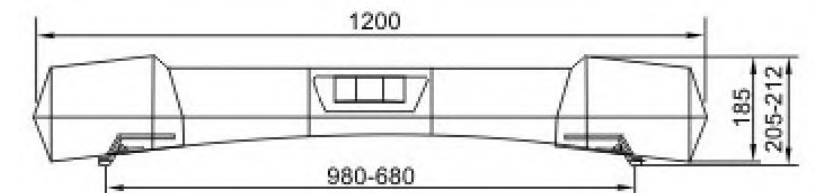


Item NO.: XYAL-1953-1.2m



DESCRIPTION

- .Multi-Voltage: LED 12VDC
- .High Intensity: Halogen 23W*4+16W*6
- .Main material:PC Lens
- .Impact resistant polycarbonate lens
- .LED Color :Red/Blue/Amber/Green/White
- .Cover Color Available: Red Blue Clear Amber
- .Base:Bracket
- .Environmental Temperature (Normal Working):-30 / +50 °C
- .Dust and Waterproof to IP67

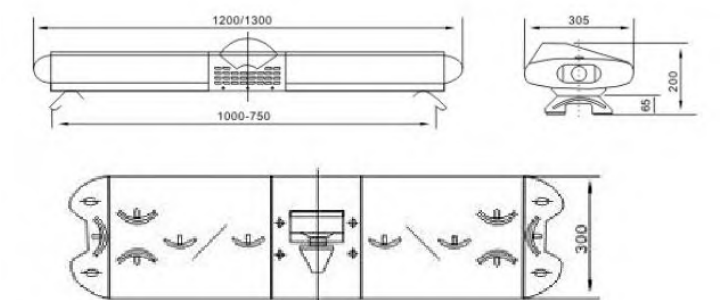


APPLICATION



LED WARNING LIGHT BAR

Item NO.:XYAL-1954-1.2m

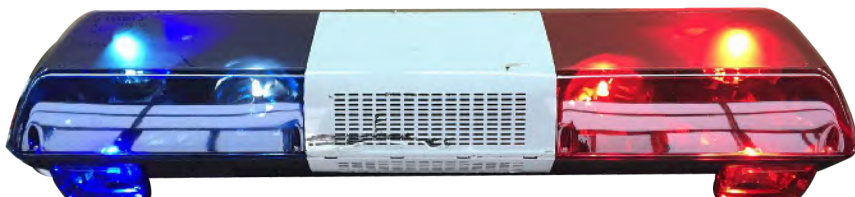


CE EMC




DESCRIPTION

- .Multi-Voltage: LED 12VDC
- .High Intensity: Halogen 23W*4+16W*6
- .Main material:PC Lens
- .Impact resistant polycarbonate lens
- .LED Color :Red/Blue/Amber/Green/White
- .Cover Color Available: Red Blue Clear Amber
- .Base:Bracket
- .Environmental Temperature (Normal Working):-30 / +50 °C
- .Dust and Waterproof to IP67

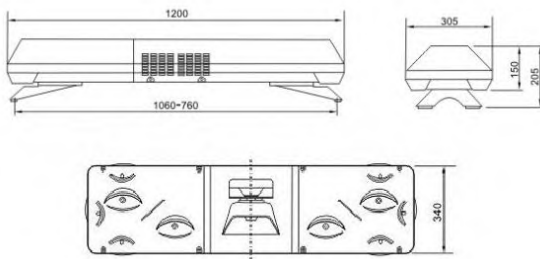


CE EMC

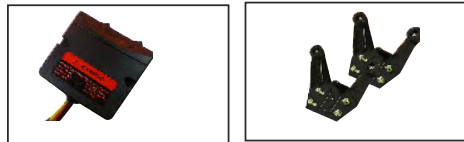

DESCRIPTION

- .Multi-Voltage: LED 12VDC
- .High Intensity: Halogen 23W*5+16W*4
- .Main material:PC Lens
- .Impact resistant polycarbonate lens
- .LED Color :Red/Blue/Amber/Green/White
- .Cover Color Available: Red Blue Clear Amber
- .Base:Bracket
- .Environmental Temperature (Normal Working):-30 / +50 °C
- .Dust and Waterproof to IP67

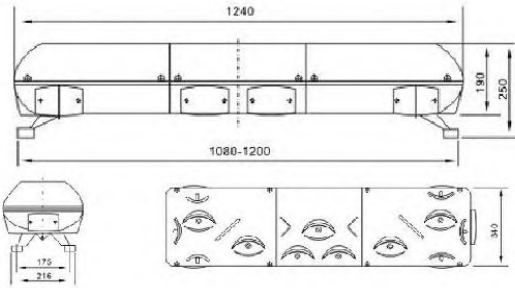

APPLICATION




LED WARNING LIGHT BAR

XYAL-2199-216W

Item NO.:



EMC ECE R65 E9 SAE

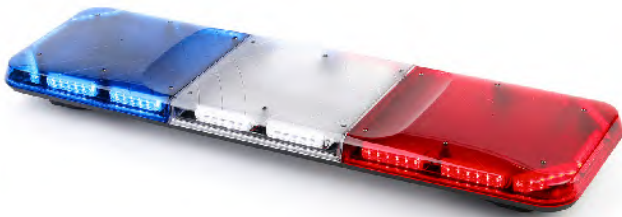

DESCRIPTION

- *GEN III LED
- *Power: 216W
- *Voltage: DC12V/DC24V
- * Lamp Color Available: Red;Blue;Amber;White;
- *Cover Color Available: Red Blue Clear Amber
- *LENS material: Poly carbonate
- *Flash pattern: 39 patterns
- *Mounting: Gutter mounting
- *Size:120(L)*34(W)*12.8(H)cm
- *Case Material :Aluminum + PC
- * ECE R65 ;SAE



EMC ECE R65 E9 SAE

Item NO.:XYAL-2200-216W



DESCRIPTION

- *GEN III LED
- *Power: 216W
- *Voltage: DC12V/DC24V
- * Lamp Color Available: Red;Blue;Amber;White;
- *Cover Color Available: Red Blue Clear Amber
- *LENS material: Poly carbonate
- *Flash pattern: 35patterns
- *Mounting: Gutter mounting
- *Size:120(L)*28(W)*9.8(H)cm
- *Case Material :Aluminum + PC
- * ECE R65 ;SAEJ845



APPLICATION



LED WARNING LIGHT BAR

XYAL-2201-300W



EMC ECE R65 E9 SAE

Item NO.:



DESCRIPTION

GEN III LED
132pcs*3W LED
DC12V/DC24V
Power:300W
LENS material: Poly carbonate
Color available: red/blue/white/amber
Housing color: Silver
Flash pattern: 45 patterns
Mounting way: Permanent/ Magnet
Size:1163(L)*338(W)*110(H)mm
4M length of 4 core wire
* ECE R65 ;SAE

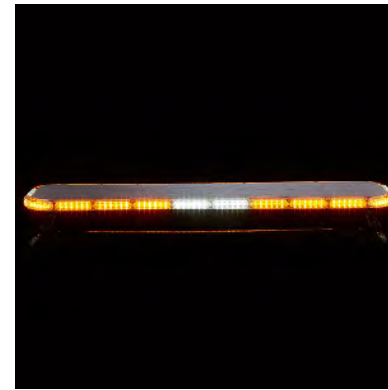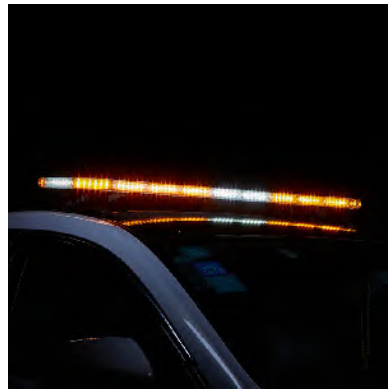

APPLICATION




LED MINI WARNING LIGHT BAR

XYAL-2133-90SMD


EMC ECE R10 E9

Item NO.:

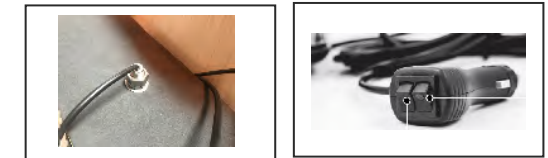


DESCRIPTION

Voltage:DC12 /24V or DC12-24V
Light Source:SMD3835,90PCS
Function:Rotating &Flashing
Lens Material:PC
Lens Color:Amber ,Transparent
Luminous color: red, yellow, blue, white, amber
Base Type:Magnet Base,Single Bolt Base
Base Material:ABS
Waterproof:IP65
Magnetic Base + Function Switch Cigar Plug & Spring Cable Or Single Bolt Base

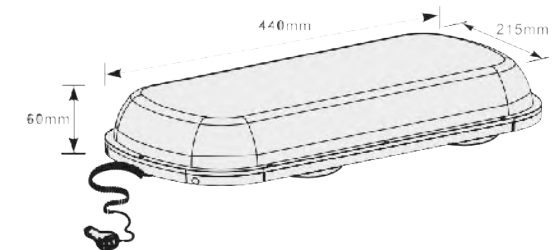

EMC ECE R10 E9

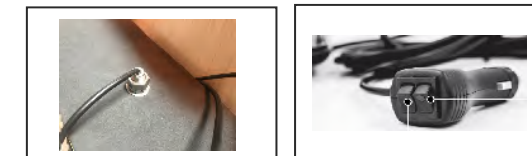


Item NO.: XYAL-2134-108W



DESCRIPTION

Voltage:DC12 /24V or DC12-24V
Light Source:3W High Power LED,36PCS
Function:Rotating &Flashing
Lens Material:PC
Lens Color:Amber ,Transparent
Luminous color: red, yellow, blue, white, amber
Base Type:Magnet Base,Single Bolt Base
Base Material:ABS
Waterproof:IP65
Magnetic Base + Function Switch Cigar Plug & Spring Cable Or Single Bolt Base

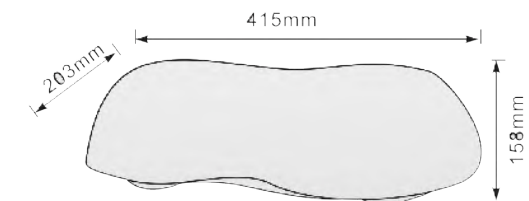

APPLICATION



LED MINI WARNING LIGHT BAR

Item NO.: XYAL-2135-90SMD




EMC ECE R10 E9



DESCRIPTION

Voltage:DC12 /24V or DC12-24V
 Light Source:SMD2835,90PCS
 Function:Rotating &Flashing
 Lens Material:PC
 Lens Color:Amber ,Transparent
 Luminous color: red, yellow, blue, white, amber
 Base Type:Magnet Base,Single Bolt Base
 Base Material:ABS
 Waterproof:IP65
 Magnetic Base + Function Switch Cigar Plug & Spring Cable Or Single Bolt Base

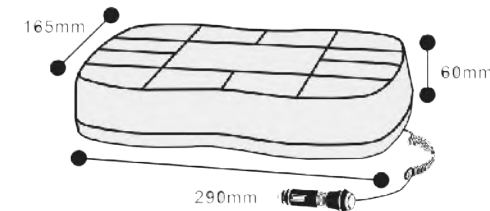


EMC ECE R10 E9



DESCRIPTION

Voltage:DC12 /24V or DC12-24V
 Light Source:3W High Power LED,36PCS
 Function:Multi-Function
 Lens Material:PC
 Lens Color:Amber, Transparent
 Luminous color: red, yellow, blue, white, amber
 Base Type:Magnet /Single bolt base/Screw Base
 Base Material:ABS
 Waterproof:IP65

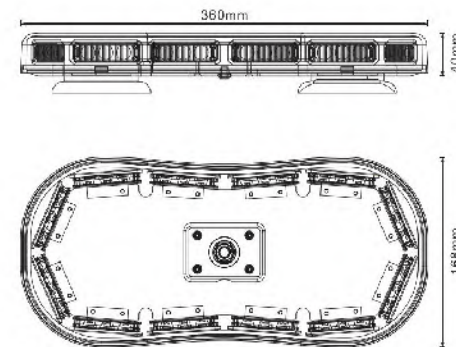

APPLICATION




LED MINI WARNING LIGHT BAR

Item NO.: XYAL-2162-30SMD




EMC ECE R10 E9

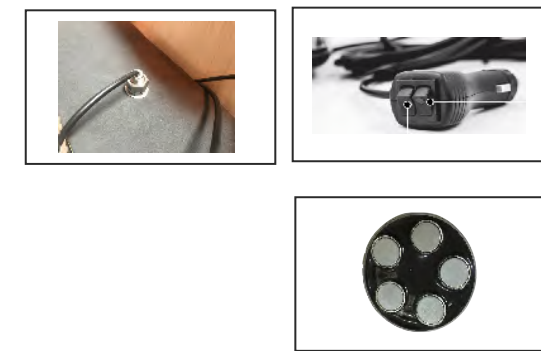

DESCRIPTION

Voltage:DC12 /24V or DC12-24V
 Light Source:3W High Power LED,36PCS
 Function:Multi-Function
 Lens Material:PC
 Lens Color:Amber, Transparent
 Luminous color: red, yellow, blue, white, amber
 Base Type:Magnet /Single bolt base/Screw Base
 Base Material:ABS
 Waterproof:IP65




EMC ECE R10 E9



DESCRIPTION

Voltage:DC12 /24V or DC12-24V
 Light Source:3W High Power LED,36PCS
 Function:Multi-Function
 Lens Material:PC
 Lens Color:Amber, Transparent
 Luminous color: red, yellow, blue, white, amber
 Base Type:Magnet /Single bolt base/Screw Base
 Base Material:ABS
 Waterproof:IP65

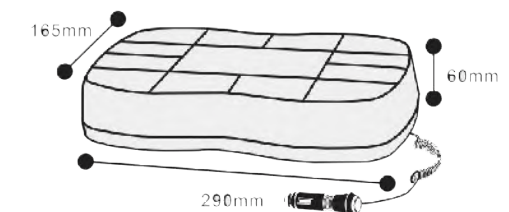

APPLICATION




LED MINI WARNING LIGHT BAR

Item NO.: XYAL-1280-24W




EMC ECE R10 E9

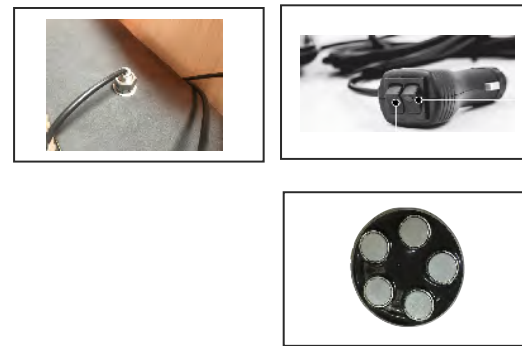

DESCRIPTION


Voltage:DC12 or DC12-24V
Light Source:1W or 3W High Power
Function:7functions for choice
Power cord length:3M
Lens Material:PC
Lens Color:Clear;Red;Blue;Amber
Luminous color: red, yellow, blue, white, amber
Base Type:Magnet Base,Single Bolt Base
Base Material:aluminum
Waterproof:IP65
have power off memory function

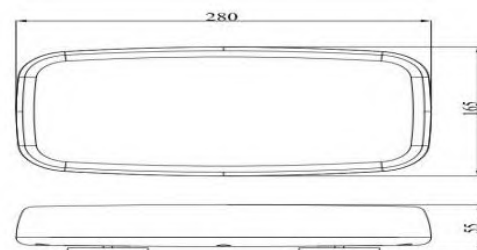

Item NO.: XYAL-0629-24W



EMC ECE R10 E9

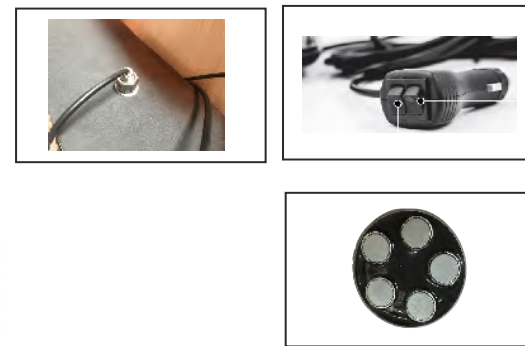

DESCRIPTION

Voltage:DC12 /24V or DC12-24V
Light Source:3W High Power LED,20PCS
Function:Multi-Function
Lens Material:PC
Lens Color:Amber, Transparent
Luminous color: red, yellow, blue, white, amber
Base Type: Magnet Base
Base Material:ABS
Waterproof:IP65



APPLICATION



LED MINI WARNING LIGHT BAR

Item NO.: XYAL-2173-60W



EMC ECE R10 E9



DESCRIPTION

Voltage:DC12 /24V or DC12-24V
Light Source:3W High Power LED,36PCS
Function:Multi-Function
Lens Material:PC
Lens Color:Amber, Transparent
Luminous color: red, yellow, blue, white, amber
Base Type:Magnet Base
Base Material:ABS
Waterproof:IP65



Item NO.: XYAL-2189-54W





EMC ECE R65 E9 SAE



DESCRIPTION

Voltage:DC10-30V
Light Source:18PC 3W High Power LED
Function:14 functions for choice
Lens Material:PC
Lens Color:Amber ,Transparent
Luminous color: red,blue,white, amber
Base Material:ABS
Working Temperature:-40 / +75 °C
R65 SAE845
Waterproof:IP65
Magnetic Base + Function Switch Cigar Plug & Spring Cable
Two Bolt fixing

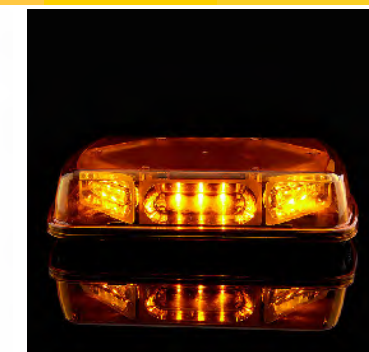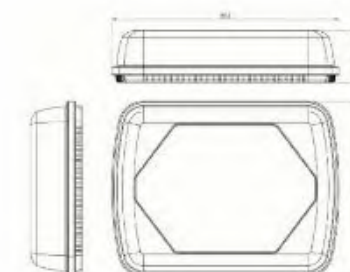


APPLICATION



LED MINI WARNING LIGHT BAR

Item NO.: XYAL-1290-72W

EMC ECE R10 E9

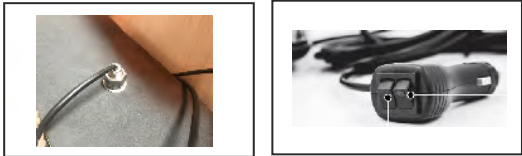


DESCRIPTION

Voltage:DC10-30V
Light Source:24PC 3W High Power LED
Function:20 functions for choice
Lens Material:PC
Lens Color:Amber ,Transparent
Luminous color: red,blue,white,amber,red/Blue;amber/Green
Base Material:ABS
Working Temperature:-20 / +40 °C
Waterproof:IP65
Magnetic Base + Function Switch Cigar Plug & Spring Cable
Two Bolt fixing



Item NO.: XYAL-2191-54W

EMC ECE R10 E9

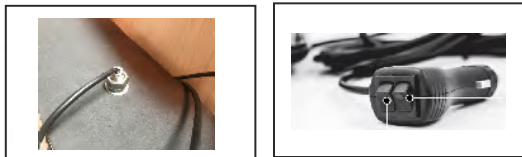

DESCRIPTION

Voltage:DC10-30V
Light Source:18PC 3W High Power LED
Function:35 functions for choice
Lens Material:PC
Lens Color:Amber ,Transparent
Luminous color: red,blue,amber,red/Blue
Base Material:ABS
Working Temperature:-20 / +40 °C
Waterproof:IP65
Magnetic Base + Function Switch Cigar Plug & Spring Cable


APPLICATION



LED MINI WARNING LIGHT BAR

Item NO.: XYAL-2192-48W

EMC ECE R10 E9

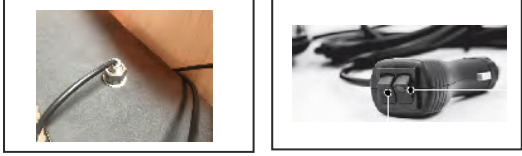

DESCRIPTION

Voltage:DC10-30V
Light Source:16PC 3W High Power LED
Function:11 functions for choice
Lens Material:PC
Lens Color:Amber ,Transparent
Luminous color: red,blue,amber,red/Blue
Base Material:ABS
Working Temperature:-20 / +40 °C
Waterproof:IP65
Magnetic Base + Function Switch Cigar Plug & Spring Cable



APPLICATION



SIREN



XYAL-2202-100W

XYAL-2203-100W

DESCRIPTION



XYAL-2204-100W



XYAL-2205-100W



XYAL-2206-100W

APPLICATION



XYAL-PA300

DESCRIPTION



XYAL-2130



XYAL-2131



XYAL-CJB-1932



XYAL-CJB-1216

APPLICATION



SIREN



XYAL-MJ100W



XYAL-2122



XYAL-2122



XYAL-2125



XYAL-2127



XYAL-2126



APPLICATION

